

COLORING YOUR WORLD IN STEEL

PRESENTING COMPLETE RANGE OF **ROOFING SOLUTIONS UNDER ONE ROOF**

- Hi-Rib Profile
- Tile Profile
- **GC & GP Sheets**
- **Door Frames**
- Purlins
- **Liner Profile**
- **Pencil Profile**
- **Coloured SDR Screws**
- Accessories
 - **Our Other Products**







MegaShine Colour Coated Profile Sheets

GO FOR A REVOLUTIONARY TECHNOLOGY THAT GIVES COLOUR COATED SHEETS A **DURABLE LIFE AND ELEGANT FINISH.**












MegaShine Colour Coated Profile Sheets

Product Specification:

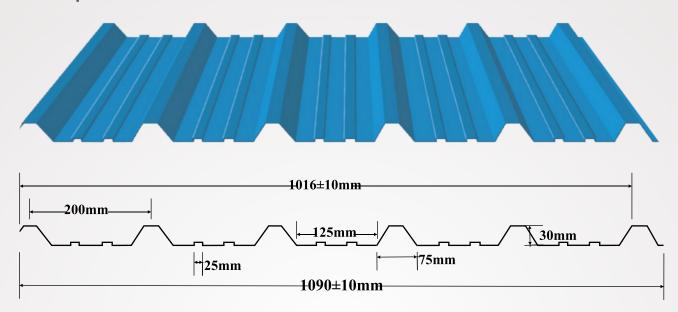



MegaShine & MegaShine [†]	
Paint Coat	Up to 40 microns
Zinc Coat	Up to 120 GSM
Base Metal	Galvanized Paint with Dual Coating
Nominal Thickness (TCT)	0.3-0.8 mm.
Length	As Per Customer Requirement
Wind Velocity	Up to 180 Km/Hr
Yield Strength	Up to 650 MPa
MegaShine [†] AZ	Up to AZ150
Guard Film	40 Microns





SAVINGS IN NUMBER OF SHEETS & LABOUR COST



ADVANCED **DESIGN FOR** BETTER STRENGTH



PERFECT **OVERLAPPING** FOR IDEL WATERPROOFING



HIGH TENSILE STRENGTH UPTO 650MPa



WITHSTANDS WIND VELOCITY UPTO 180Km/Hr




4 LAYERS OF COATING





KP Galvanized Corrugated Sheets (G.C.) MegaShine Colour Coated Corrugated Sheets

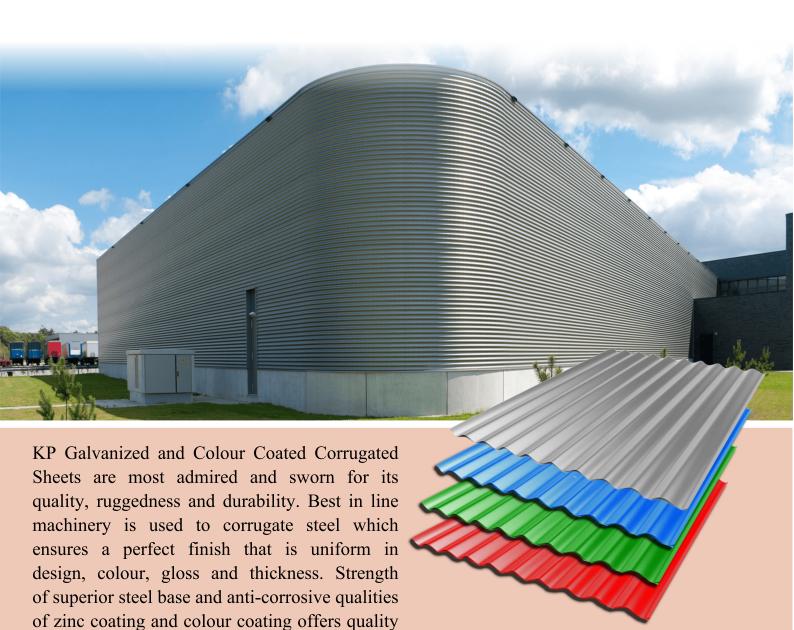







product that protects against climatic harshness and ensures dependability for a long life.






















KP Galvanized Corrugated Sheets (G.C.)
MegaShine Colour Coated Corrugated Sheets

Product Specification:

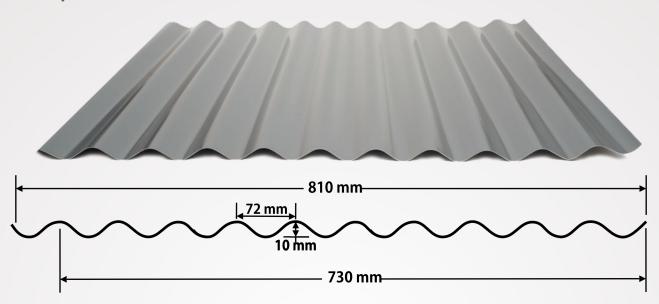



KP Corrugated Sheets & MegaShine Colour Corrugated Sheet	
Sheet Width	810 mm
Zinc Coat	Up to 150 GSM
Base Metal	Galvanized Plain
Nominal Thickness (TCT)	0.2-0.8 mm.
Length	As Per Customer Requirement
Wind Velocity	Up to 180 Kmph
Yield Strength	Up to 650 MPa
Guard Film	Optional (MegaShine Coloured Sheets)
Paint Coat	40 microns (MegaShine Coloured Sheets)









High Solar Reflectivity

Assured Performance

Environment Friendly Genuineness





KP Door Frames

Security of Steel & Stunning Finish!!!












KP Door Frames

Product Specification:

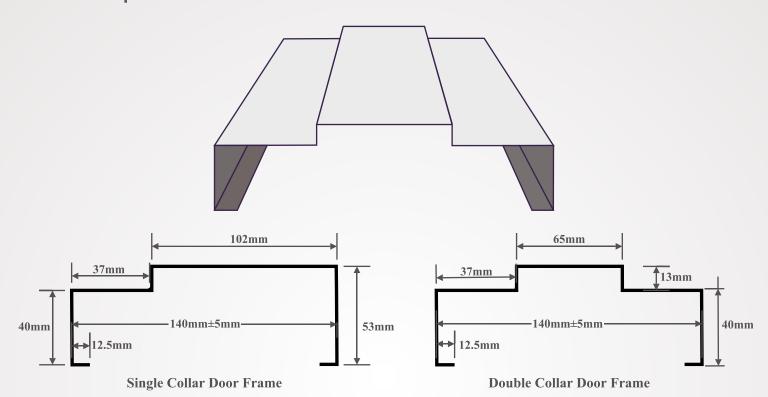



MegaShine Door Frames	
Paint Coat	Up to 40 microns
Zinc Coat	Up to 120 GSM
Base Metal	Galvanized Paint with Dual Coating
Nominal Thickness (TCT)	0.8-1.5 mm.
Length	As Per Customer Requirement
Yield Strength	Up to 1000 MPa
Megashine ⁺ AZ	Up to AZ150
Guard Film	40 Microns (OPTIONAL)
Frame Types	Single Collar & Double Collar



DURABLE



COST SAVER



ADVANCED DESIGN FOR BETTER **STRENGTH**



HIGH TENSILE STRENGTH UPTO 650MPa



4 LAYERS COATING



MegaShine


























Factory: Vill. Hedon, Ludhiana-Chandigarh Road, Samrala, Distt. Ludhiana, PB 141114

Office: KP ENTERPRISES, Overlock Road, Ludhiana, PB 141003
Contact No. 75083-17000, 75084-17000, 75085-17000

Email: sales@kangprofiles.com Website: www.kangprofiles.com



